



Mn-Zn Ferrite EF Cores

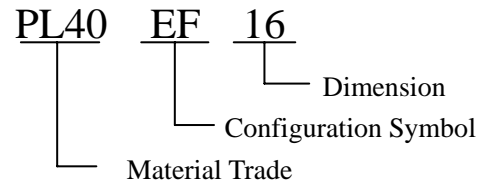

Ordering code	Dimensions (mm)						Effective Parameter					AL ($\pm 25\%$) (1kHz.50mV.HP4284A)				
	A	B	C	D	E min	F	Cl(mm^{-1})	Ae(mm^2)	Le(mm)	Ve(mm^3)	We(g)	PL30	PL40	PL44	H075	H100
EF12.6	12.6 \pm 0.4	6.4 \pm 0.3	3.6 \pm 0.2	3.5 \pm 0.2	8.8	4.6 \pm 0.2	2.25	13.1	29.4	383	1.8	810	770	710	2000	2300
EF16	16.1 \pm 0.4	8.05 \pm 0.25	4.8 \pm 0.2	4.6 \pm 0.2	11.3	5.9 \pm 0.2	1.70	22.0	37.3	819	3.9	1000min	920min	940	2800	3200
EF20	20.0 \pm 0.4	9.9 \pm 0.25	5.7 \pm 0.2	5.7 \pm 0.2	14.1	7.2 \pm 0.2	1.42	32.4	45.9	1490	7.2	1600	1500	1300	4000	4700
EF25	25.4 \pm 0.5	12.7 \pm 0.3	7.2 \pm 0.2	7.25 \pm 0.25	18.0	9.2 \pm 0.2	1.13	52.0	58.8	3060	14.7	2000	1800	1600	6000	8000
EF25 \times 11.3	25.4 \pm 0.5	12.7 \pm 0.3	11.3 \pm 0.2	7.25 \pm 0.25	18.0	9.2 \pm 0.2	0.76	77.8	59.2	4610	22.1	3000	2800	2500	8000	9600
EF28	28.0 \pm 0.5	14.0 \pm 0.3	10.6 \pm 0.2	7.2 \pm 0.3	18.9	9.5 \pm 0.2	0.72	87.1	62.4	5440	26.1	3800	3500	3000	9400	11300
EF32	32.0 \pm 0.5	16.0 \pm 0.4	9.5 \pm 0.3	9.5 \pm 0.3	22.7	11.2 \pm 0.3	0.81	89.8	72.9	6550	31.4	3000	2800	2500	8200	10000